

We want to grow with you



# PRESSTA 5000

## Corner crimping machine



Corner crimping machine PRESSTA 5000


- Crimping of aluminium profiles up to 160 mm
- Pressing height max. 130 mm / 145 mm
- Pneumatic press-operation via leverage, power 56 kN each head
- Submerging backing blocks with infinitely variable hydraulic lock - V-block height max. 120 mm
- 3 Sets crimping tools 3, 5, and 7 mm
- 2 V-blocks
- 2 Swiveling support arms
- Foot pedal controlled



- Max. 3 crimping tools each head
- Power 56 KN each head at 8 bar
- Crimping points adjustable at 25-60 mm
- 2 pneumatic down clamps
- Max. Profile height 160 mm
- Descending V-blocks with infinitely variable hydraulic lock



- (Option) Split horizontal punching heads to compensate profile off-set up to 40 mm
- Max. Crimping height 130 mm with standard heads
- Max. Crimping height 145 mm with split horizontal heads
- V-Stop adjustable in height
- 2 Excenter disc for good positioning of profiles

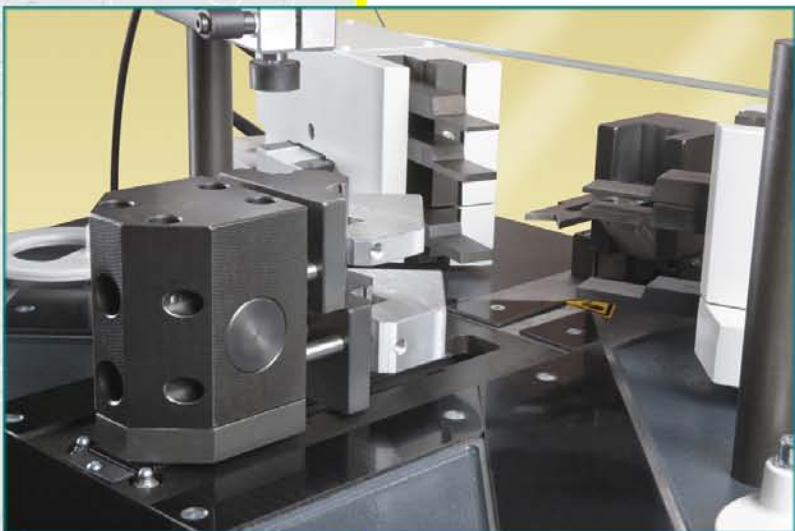

- (Option) Automatic counter support to compensate profile off-set or tolerances up to 25 mm
- Max. V-block height 120 mm
- Smallest inside frame measure 110 mm -standard counter support, (automatic counter support 175 mm)

#### Technical Data PRESSTA 5000:

Pressure: 6 – 8 bar  
Power: 56 KN  
Groove measure: 25 – 60 mm  
Support arms: 1000 mm  
Working height: 950 mm  
Dimension: 1250x680x950 mm (LxWxH)  
Weight: 260 kg  
Colour: RAL 7016/7035