


PANTO 300

Three spindle copy router



Three spindle copy router PANTO 300

- For routing in aluminium and PVC profiles for the production of windows and doors.
- Profile depth to 110 mm, Machining on three faces.
- Profile width to 300mm, only with vertical milling unit (e.g. for letterbox).
- 3 independent working routing units, therefore very stable construction.
- Infinite speed adjustment from 7.000 r.p.m. to 12.000 r.p.m. for each Motor.
- Copy routing 1:1 ratio with all 3 milling spindles, thereby mass low priced tools usable.
- Separate operation of the horizontal and vertical milling spindels by means of 4 levers.

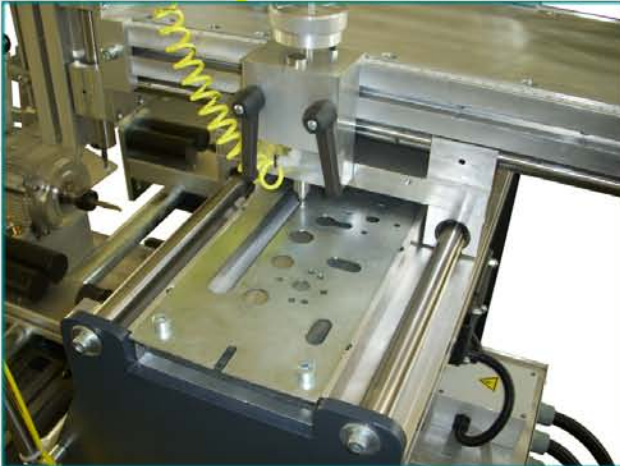

Stylus

- Pneumatic
- Triple stepped pin adjustable for cutters with diameter 5,8 and 10mm
- Manual positioning by means of measuring tape



Standard equipment

- Horizontal pneumatic material clamping by two clamping cylinders
- Sprayer coolant system with 3 nozzles
- Pneumatic copy bolts - 2 vertical, 2 horizontal
- 2 copy templates



Revolving stop

- For pin dimension adjustment
- With four positions
- Disposable on vertical and horizontal styluses